


Pre-Lay Plumbing and Electrical DYNAMIC/X8



Electrical Connection

The heat pump is supplied with a 10amp earthed plug and lead that may be run off a power socket where such connection is compliant with national wiring regulations AS.3000 and/or such requirements stipulated by local authorizing bodies. Electrical connection is recommended to be connected to an isolated 16A RCD/MCB or RCBO at the switchboard on a dedicated circuit to a 10A GPO at the heat pump location.

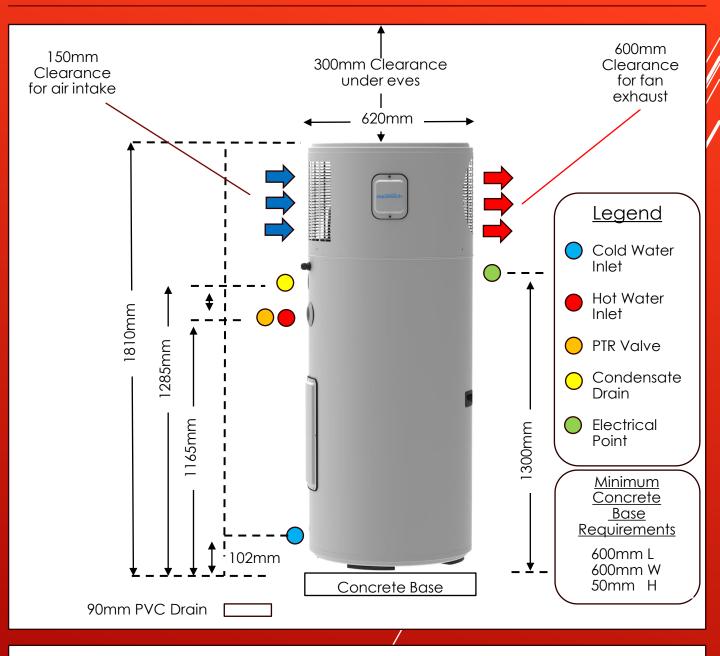